

SPINAclear Anbauleuchte

SPINAclear mounting lamp




SPINAclear-Anbauleuchte

- Edelstahl poliert
- EVG 230V/50Hz
- Rotorfassung G5
- Leuchtenschutzgrad IP20
- Geeignet für den Anbau sämtlicher Reflektoren und Diffusoren

SPINAclear mounted lamp

- Buffed stainless steel
- EBU 230V/50Hz
- G5 twist-in lamp holders
- Lamp protection level IP20
- Suitable for fitting all types of reflectors and dif fusers

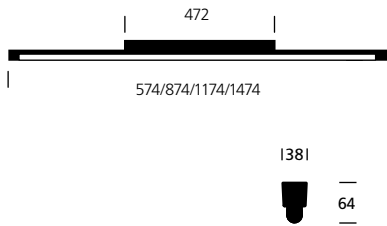

	Watt	Länge mm Length mm	Art.Nr. Item No.	CHF MwSt. excl.	EUR VAT excl.
	1 x 14/24	574	207.140.01	337.-	229.-
	1 x 21/39	874	207.210.01	357.-	243.-
	1 x 28/54	1174	207.280.01	375.-	255.-
	1 x 35/49	1474	207.350.01	398.-	272.-
EVG dimmbar 1-10 V EBU dimmable 1-10 V	1 x 14/24	574	207.140.01 D	436.-	297.-
	1 x 21/39	874	207.210.01 D	457.-	311.-
	1 x 28/54	1174	207.280.01 D	474.-	322.-
	1 x 35/49	1474	207.350.01 D	496.-	340.-
dimmbare DALI/TouchDIM dimmable DALI/TouchDIM	1 x 14/24	574	207.140.01 DIG	505.-	343.-
	1 x 21/39	874	207.210.01 DIG	526.-	357.-
	1 x 28/54	1174	207.280.01 DIG	543.-	369.-
	1 x 35/49	1474	207.350.01 DIG	569.-	387.-


SPINAclear-Diffusoren

SPINAclear diffusers



Diffusor satiné/klar

- aus PMMA




- CO/C 180 cd/1000lm - C90/C270

	Watt	Länge mm Length mm	Art.Nr. Item No.	CHF MwSt. excl.	EUR VAT excl.
	1 x 14/24	500	528.140.0	45.-	31.-
	1 x 21/39	800	528.210.0	48.-	33.-
	1 x 28/54	1100	528.280.0	51.-	35.-
	1 x 35/49	1400	528.350.0	54.-	37.-



Diffusor satiné/Pyramiden-Optik

- aus PMMA




- CO/C 180 cd/1000lm - C90/C270

	Watt	Länge mm Length mm	Art.Nr. Item No.	CHF MwSt. excl.	EUR VAT excl.
	1 x 14/24	500	529.140.0	45.-	31.-
	1 x 21/39	800	529.210.0	48.-	33.-
	1 x 28/54	1100	529.280.0	51.-	35.-
	1 x 35/49	1400	529.350.0	54.-	37.-



Lochblech-Diffusor

- Alu poliert
- 1-teilig, 1 x 180°



- CO/C 180 cd/1000lm - C90/C270

	Watt	Länge mm Length mm	Art.Nr. Item No.	CHF MwSt. excl.	EUR VAT excl.
	1 x 14/24	500	530.140.1	74.-	50.-
	1 x 21/39	800	530.210.1	82.-	56.-
	1 x 28/54	1100	530.280.1	96.-	65.-
	1 x 35/49	1400	530.350.1	112.-	76.-

