


# FLEXLED ROLL RGB

## 24V



### FLEXLED ROLL RGB, 24V

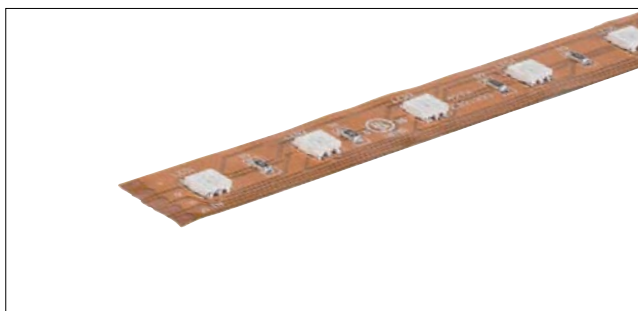

48 LEDs per m  
 Width / height: 1.5/0.2 cm  
 LED spacing: 2.1 cm  
 Can be separated every 12.5 cm  
 Minimum bend radius: 1.3 cm

If necessary, we will solder a feed-in cable with a length of 2 m to the LED strip.

5 m

Colour temperature	Output (W)	L (cm)	Item no.
RGB	41	500	552123

To obtain consistent light output from a length of 1.5 m, we recommend having a feed-in to the strips at both sides. For lengths in excess of 5 m, a new feed-in must be made.

### FLEXLED ROLL RGB 24V ACCESSORIES



Feed-in



Direct connector

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.
<input type="checkbox"/> Feed-in, 1 piece	2A	plastic	50	-	-	550418
<input checked="" type="checkbox"/> Direct connector, 1 pieces	2A	plastic	-	2.4	0.4	550419

 To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile. Rear of LED strips with adhesive tape