

800


Wireless
Stereo Headset



Instructions

Box Contents

1. A Wireless headset
2. A Charging Cable
3. A Instructions
4. Three Earmuffs

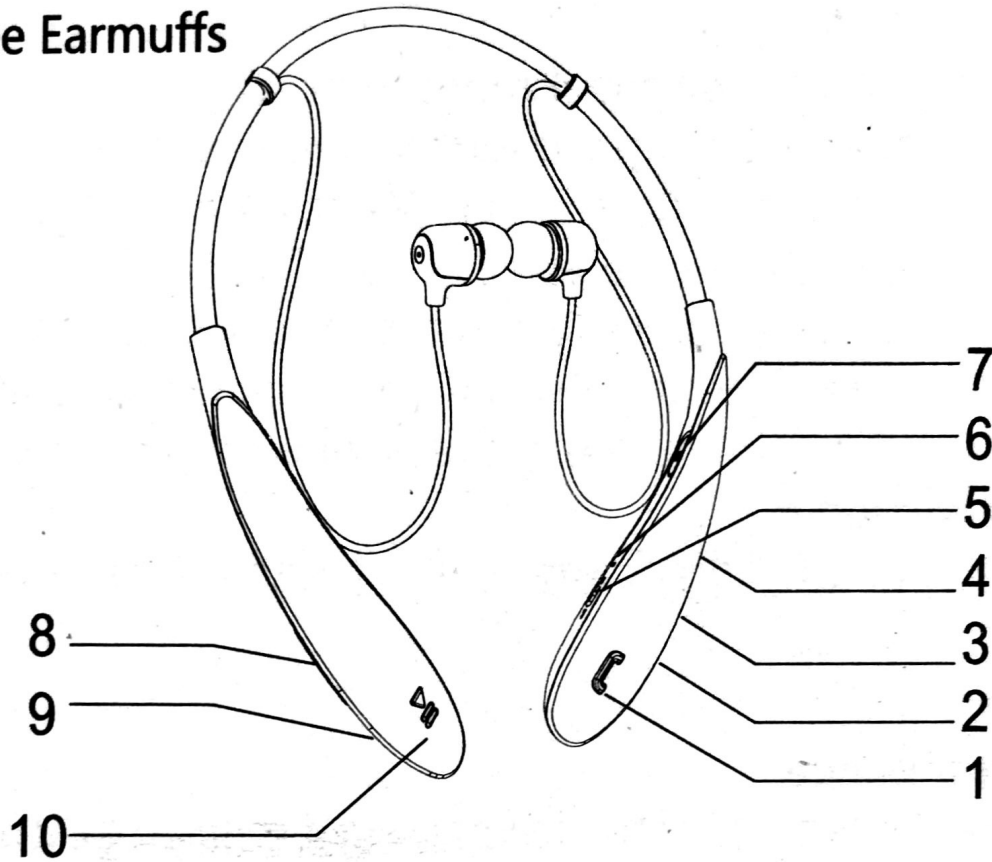

Know your 800

1. Answer, Hang up
2. MIC
3. Volume-Volume
4. Volume+
5. ON/OFF
6. LED
7. USB
8. Forwardbutton
9. Backwardbutton
10. Play/Pause

800 Charging

Before using your Wireless headset, follow these steps:

Make sure that your Wireless headset is fully charged.

Keep a fully charged Wireless headset with Wireless-enabled mobile phone connected with,

Before first use Wireless, we recommend first battery is fully charged.

Please insert the charging plug to charge the Wireless headset jack, can be used to connect the AC power charge

Appliances, can also be connected to PC on USB data cable, charging, the red indicator light.

800 on / off

1 Wireless headset boot: Please dial key switch to "ON" file, blue light After a bright red light flashes twice every second, which means that is turned on.

2 Wireless headset off: Keep the switch button dial to "OFF" file, the red light flashes twice every one second, Indicates off.

800 paired with your phone

1 To ensure the smooth pairing, as close to the phone and headset (should be less than 1 m distance). Alternately flashing red and blue lights, Headset into pairing mode state.

2 Open the phone's Wireless function and enter Scan for Wireless devices (please refer to the phone Manual operation), after scanning is complete will display all the searched Wireless devices, Select your phone pairing list "H "Words, follow the prompts pairing.

3 Enter the default password "0000" to confirm the completion of the pairing. When the headset indicator light flashes blue Flashes when the headset with your phone to complete the pairing and connection






Note: How Your phone is Wireless version 2.1 or later version, the use of ear Not need to enter a password when paired machine.

Connection 800

To the computer

Via USB Wireless adapter (specifically refer to the Wireless adapter's instructions) Connected to the computer, you can use 800 Conduct Skype or QQ.

Wireless Headset Mode Operation

Function	Description
Last number Redial	Double-click the 
Answer a Call / End a Call	Click 
Back	Click 
Next	Click 
Play/Pause	Click 
Volume+-	Click + -

LED Indicator Operation

Function	Description
Power OFF	All LED OFF
Wireless Power ON/OFF	Red and Blue LED light
Wireless pairing success	Blue LED will Slow flash
Answering a call	Blue LED will Fast flash
Charging	Red LED will be on
Full power	Blue LED will be on
ON, OFF, Callin	Vibrating alert

800 Troubleshooting

If you fail to successfully connect the headset with the phone on or normal use, try the following steps.

- Make sure your phone is turned on the Wireless function to verify that paired the headset with your phone.
- Check the headset with your phone if more than 10 meters away, whether electronic products between Or signal interference power, etc.
- headset can store eight paired devices, or Wireless headset pairing list is full, then Times paired with the headset.
- If the headset does not automatically connect or disconnect the phone while listening to music, re-charging Reboot your headset or pair.
- When the music silent, please carefully check whether your device under the minimum volume.
- Please check the battery is fully charged, if full, the red light is off.

800 Care and Maintenance

Consider turning your headset off before placing it in your pocket or bag , If the button is accidentally activated,Your mobile phone may place an unintended call.

Do not expose the headset to liquid ,moisture or humidity as it is not waterproof.

Do not use abrasive cleaning solvents to clean the headset.

Do not expose the headset to extreme temperature conditions .The best store temperature range is from -10 to +60,otherwise the life of the headset will be influeced.

Do not dispose of the headset is a fire as it this may result in an explosion
Do not bring your headset into contact with sharp objects as this will cause scratched and damage.

Do not attempt to disassemble the headset as ist dose not contain serviceable components.

If you do not use the headset for long periods ,be sure to store it in a dry place ,free from extreme.

Temperature conditions and dust.

•Product Specifications

1 Wireless v4.0 Class 2

2 Distance coverage up to 10 meters

3 Support Wireless headset,
handsfree, A2DP & AVRCP Profiles

4 Charging time: 3 hours

5 Music playing / Talk time: 7-8 hours

6 power rating 17 mW

7 Speaker 32 Ω

8 Standby time: 250 hours

9 Frequency Table: 2400.0-2483.5 MHz
unlicensed ISM band

10 Sensitivity: < -82 dBm at $< 0.1\%$ BER

11 Rechargeable 200 mA/h li-polymer
battery

12 Work Voltage DC 3.3V TO 4.2 V

13 Charger : DC 5V(300mA)

14 weight: 33.2g